


K2-0.31II Series for 0.7mm [28mil] Pitch


Unit: mm [inch]

K2-0.31II Series Plunger Tip Styles


Probe Length: 14.5mm [0.571inch]




K2-0.31II CA-4.5M0.34-9



K2-0.31II CH-4.5M0.34-7




K2-0.31II G-4.5M0.34-5




K2-0.31II U-4.5M0.34-3

K2-0.31II Series Plunger Tip Styles


Probe Length: 12.0mm [0.472inch]




K2-0.31II A-2M-11




K2-0.31II AH-2M-4



K2-0.31II F-2M-3



K2-0.31II H-2M-11





K2-0.31II Q-2M-5

Spring Probe

Receptacle

Spring Probe

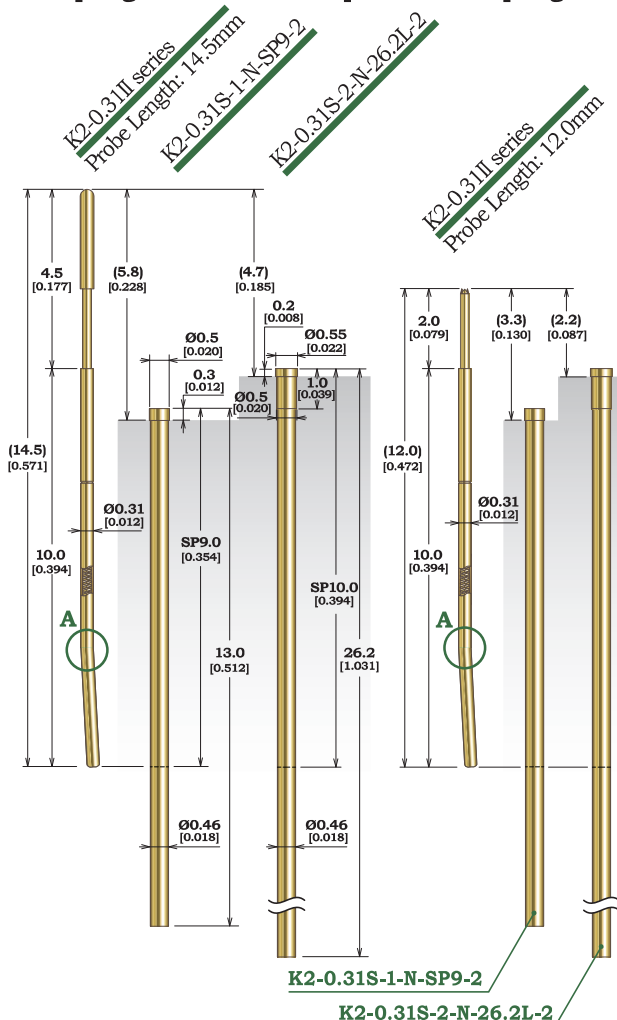

抜け止め用曲げ加工
Bending for retention

■ スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	25gf [0.88oz.]
初期荷重 Initial Force	5gf [0.18oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	20万回 (200K Cycles)
抵抗値 Resistance (Typ.)	180mΩ
最大許容電流値 Current Rating (Typ.)	Probe Length: 14.5mm 2.3A Probe Length: 12.0mm 1.9A
使用温度 Operating Temp.	-45°C ~ 125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Au Clad
Spring	Music Wire / Au

■ リセプタクル品名 Receptacle

K2-0.31S-1-N-SP9-2
(末端加工無し / No Termination)



K2-0.31S-2-N-26.2L-2
(末端加工無し / No Termination)



■ リセプタクル仕様 Receptacle Specifications

Material/Finish	Phosphor Bronze / Au
-----------------	----------------------