


# K2-0.38II Series for 0.8mm [31mil] Pitch


K2-0.38II Series Plunger Tip Styles

Unit: mm [inch]


Probe Length: 12.0mm [0.472inch]

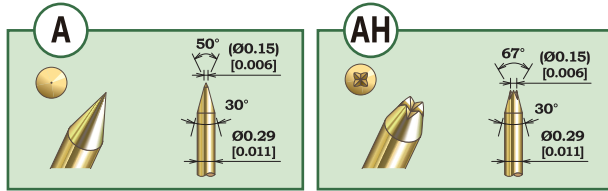


K2-0.38IIA-2M-8




K2-0.38IIAH-2M-7



K2-0.38IIF-2M-3



K2-0.38IIH-2M-5





K2-0.38IIQ-2M-13

Spring Probe

Receptacle

K2-0.38II series  
Probe Length: 12.0mm

K2-0.38S-1-N-SP9-2  
K2-0.38S-2-N-26.2L-2  
K2-0.38S-3-N-SP9-2

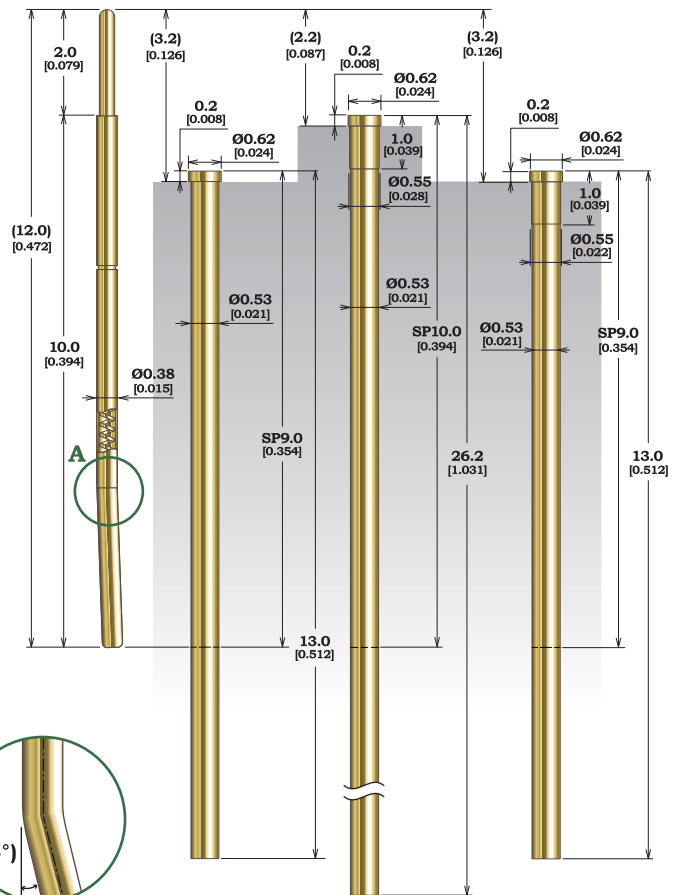

抜け止め用曲げ加工付  
Bending for retention

Standard Type

## ■ スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	33gf [1.16oz.]
初期荷重 Initial Force	18gf [0.63oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1000K Cycles)
抵抗値 Resistance (Typ.)	100mΩ
最大許容電流値 Current Rating (Typ.)	2.1A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

## ■ リセプタクル 品名 Receptacle

**K2-0.38S-1-N-SP9-2**

(末端加工無し / No Termination)



**K2-0.38S-2-N-26.2L-2**

(末端加工無し / No Termination)



**K2-0.38S-3-N-SP9-2**

(末端加工無し / No Termination)



## ■ リセプタクル仕様 Receptacle Specifications


Material/Finish	Brass / Au
-----------------	------------

# K2-0.38II Series for 0.8mm [31mil] Pitch


Unit: mm [inch]

## K2-0.38II Series Plunger Tip Styles


Probe Length: 14.5mm [0.571inch]




K2-0.38II CA-4.5M0.4-7




K2-0.38II CH-4.5M0.4-12



K2-0.38II G-4.5M0.4-9





K2-0.38II LC-4.5M0.4-5



K2-0.38II U-4.5M0.4-5

## Spring Probe

## Receptacle

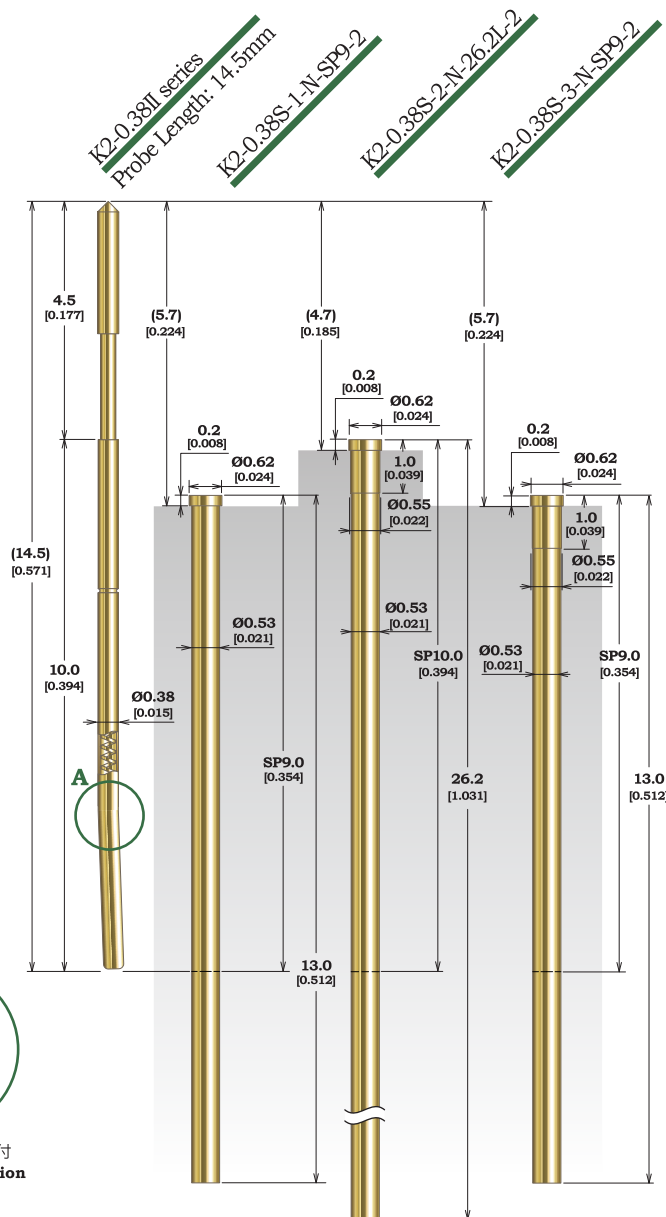

## スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [ 0.052 inch ]
荷重 Spring Force at Operating Travel	33gf [ 1.16oz. ]
初期荷重 Initial Force	18gf [ 0.63oz. ]
最大ストローク Max Travel	2.0mm [ 0.079 inch ]
スプリング耐久回数 Life Span at Operating Travel	100 万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	100mΩ
最大許容電流値 Current Rating (Typ.)	2.8A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze /Au
Spring	Music Wire / Au

## リセプタクル 品名 Receptacle

- K2-0.38S-1-N-SP9-2**  
 (末端加工無し / No Termination)
- K2-0.38S-2-N-26.2L-2**  
 (末端加工無し / No Termination)
- K2-0.38S-3-N-SP9-2**  
 (末端加工無し / No Termination)

## リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

\*All specifications are subject to change without notice.