
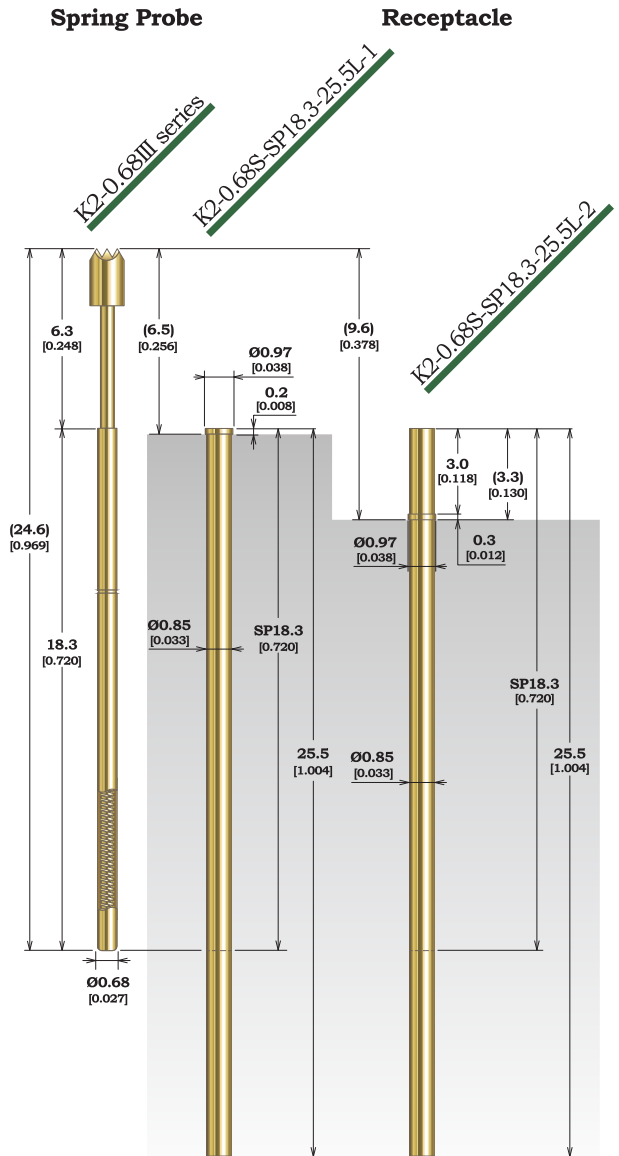


# K2-0.68III Series for 1.27mm [50mil] Pitch

Unit: mm [inch]

## K2-0.68III Series Plunger Tip Styles


Probe Length: 24.6mm [0.969inch]

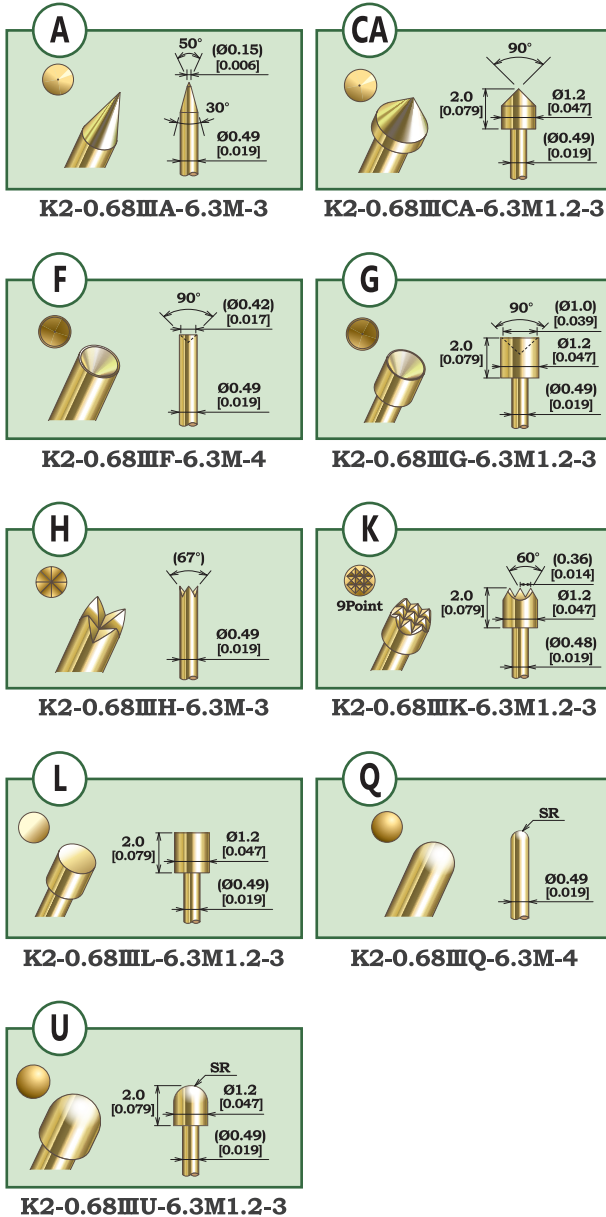

## スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	2.87mm [ 0.113 inch ]
荷重 Spring Force at Operating Travel	80gf [ 2.82oz. ]
初期荷重 Initial Force	27gf [ 0.95oz. ]
最大ストローク Max Travel	4.3mm [ 0.169 inch ]
スプリング耐久回数 Life Span at Operating Travel	10 万回 (100K Cycles)
抵抗値 Resistance (Typ.)	60mΩ
最大許容電流値 Current Rating (Typ.)	5.1A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze /Au
Spring	Music Wire / Au

## リセプタクル 品名 Receptacle

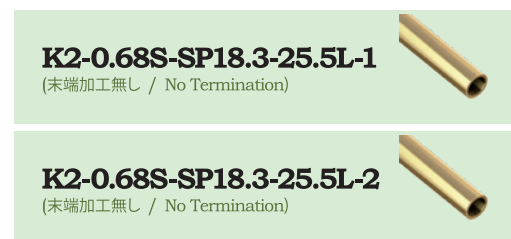

## リセプタクル仕様 Receptacle Specifications


Material/Finish	Brass / Au
-----------------	------------

# K2-0.72II Series for 1.27mm [50mil] Pitch


## K2-0.72II Series Plunger Tip Styles

Probe Length: 22.8mm [0.898inch]


Unit: mm [inch]

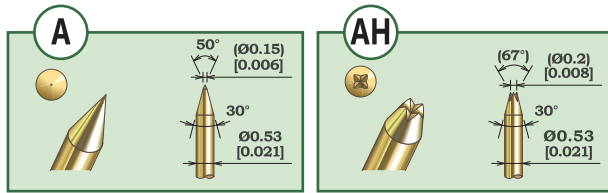


**K2-0.72IIA-4.5M-4**  
Plunger Material: SK (Steel)

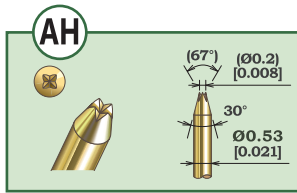


**K2-0.72IIAH-4.5M-4**  
Plunger Material: SK (Steel)

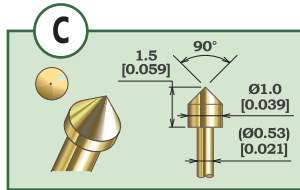


**K2-0.72IIC-4M1.0-1**  
Plunger Material: SK (Steel)

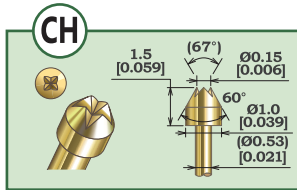


**K2-0.72IIIC-4.5M1.0-4**  
Plunger Material: SK (Steel)

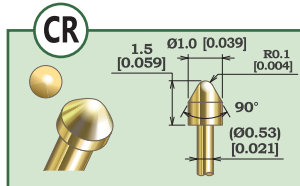


**K2-0.72IICR-4.5M1.0-3**  
Plunger Material: SK (Steel)

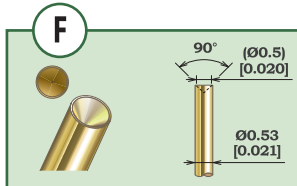


**K2-0.72IIF-4.5M-5**  
Plunger Material: SK (Steel)

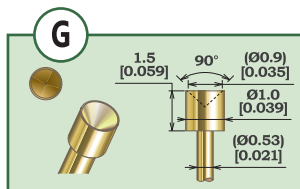


**K2-0.72IIG-4.5M1.0-2**  
Plunger Material: SK (Steel)

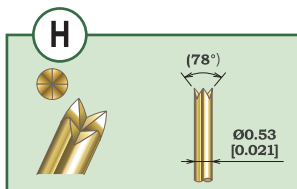

**K2-0.72IIH-4.5M-4**  
Plunger Material: SK (Steel)

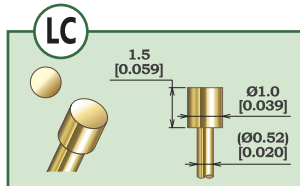

**K2-0.72IILC-4.5M1.0-1**  
Plunger Material: BeCu

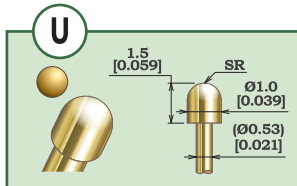


**K2-0.72IIU-4.5M1.0-4**  
Plunger Material: SK (Steel)

## スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	2.0mm [0.079 inch]
荷重 Spring Force at Operating Travel	80gf [2.82oz.]
初期荷重 Initial Force	33gf [1.16oz.]
最大ストローク Max Travel	3.0mm [0.118 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	50mΩ
最大許容電流値 Current Rating (Typ.)	4.4A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) or BeCu / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

## Spring Probe

## Receptacle

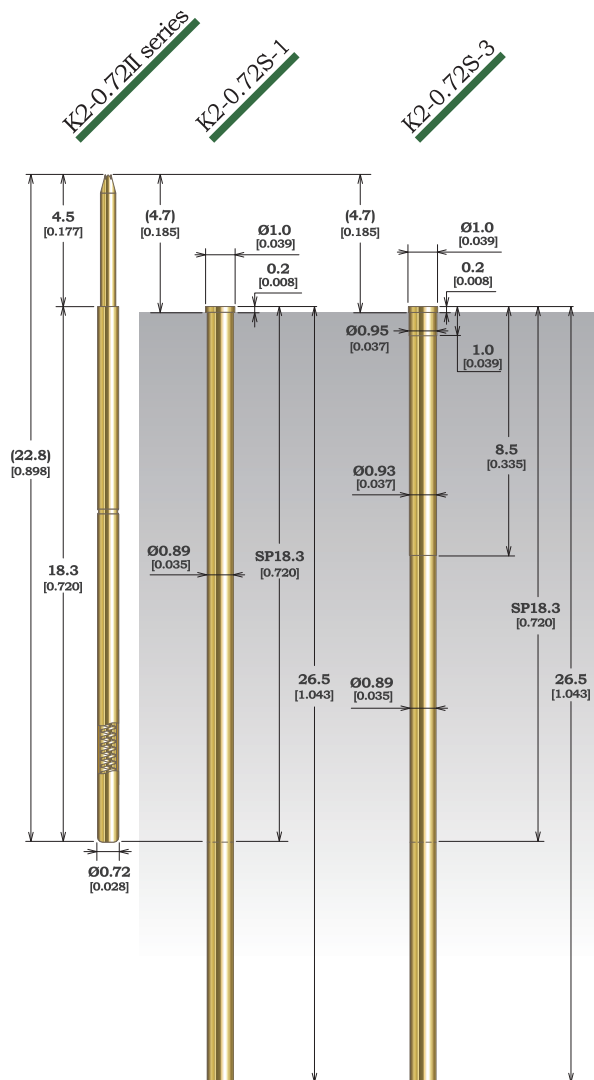

## リセプタクル 品名 Receptacle

### K2-0.72S-1

(末端加工無し / No Termination)



### K2-0.72S-1-U

(ソルダーカップ付 / with Solder Cup)



### K2-0.72S-3

(末端加工無し / No Termination)



### K2-0.72S-3-1-U

(ソルダーカップ付 / with Solder Cup)



## リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

Standard Type